

# Service Manual Trucks




Group **37**  
Electrical Schematic:  
Qual Comm

VN

From Build Date 5/99



BATTERY 12 VOLT  
IGNITION 12 VOLT  
ACCESSORY 12 VOLT



400-G

401-G

TO  
DIAGNOSTIC  
SCHEMATIC

GROUND

LHS GROUND  
STUD #18 INTERIOR SIDE

# Qual Comm - VN

CONNECTOR AND SPLICE INFORMATION  
CONNECTORS VIEWED FROM CABLE ENTRY

CONNECTOR 1  
QUALCOMM POWER CONNECTION MAIN CAB



TABLE OF CONTENTS		
CAVITY	CIRCUIT	FUNCTION
A	0X-A	GROUND
B	951	12 VOLT SUPPLY IGNITION
C	950	12 VOLT SUPPLY BATTERY

CONNECTOR 2  
DIAGNOSTIC CONNECTION QUALCOMM




TABLE OF CONTENTS		
CAVITY	CIRCUIT	FUNCTION
A	401-G	INVERTED DATA LINK (-)
B	400-G	NONINVERTED DATA LINK (+)

— DENOTES TWISTED PAIR

SYMBOL DEFINITION	SYMBOL DEFINITION
<p>DENOTES SPLICE</p> <p>EXAMPLE SHOWN IS A 1:2 SPLICE</p>	<p>DENOTES MALE TERMINAL</p> <p>DENOTES CONNECTOR</p> <p>DENOTES CAVITY</p> <p>DENOTES FEMALE TERMINAL</p>

CHANGE HISTORY


EFFECTIVE DATE	DESCRIPTION
11/99	FUSE CHANGE

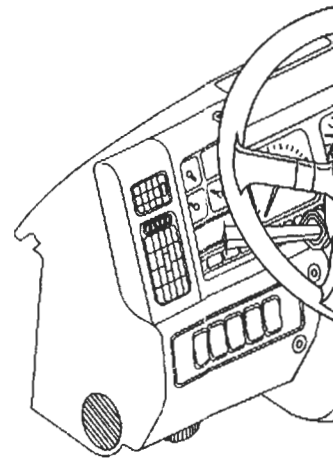


V850168

CHANGE HISTORY

DESCRIPTION
FUSE CHANGE

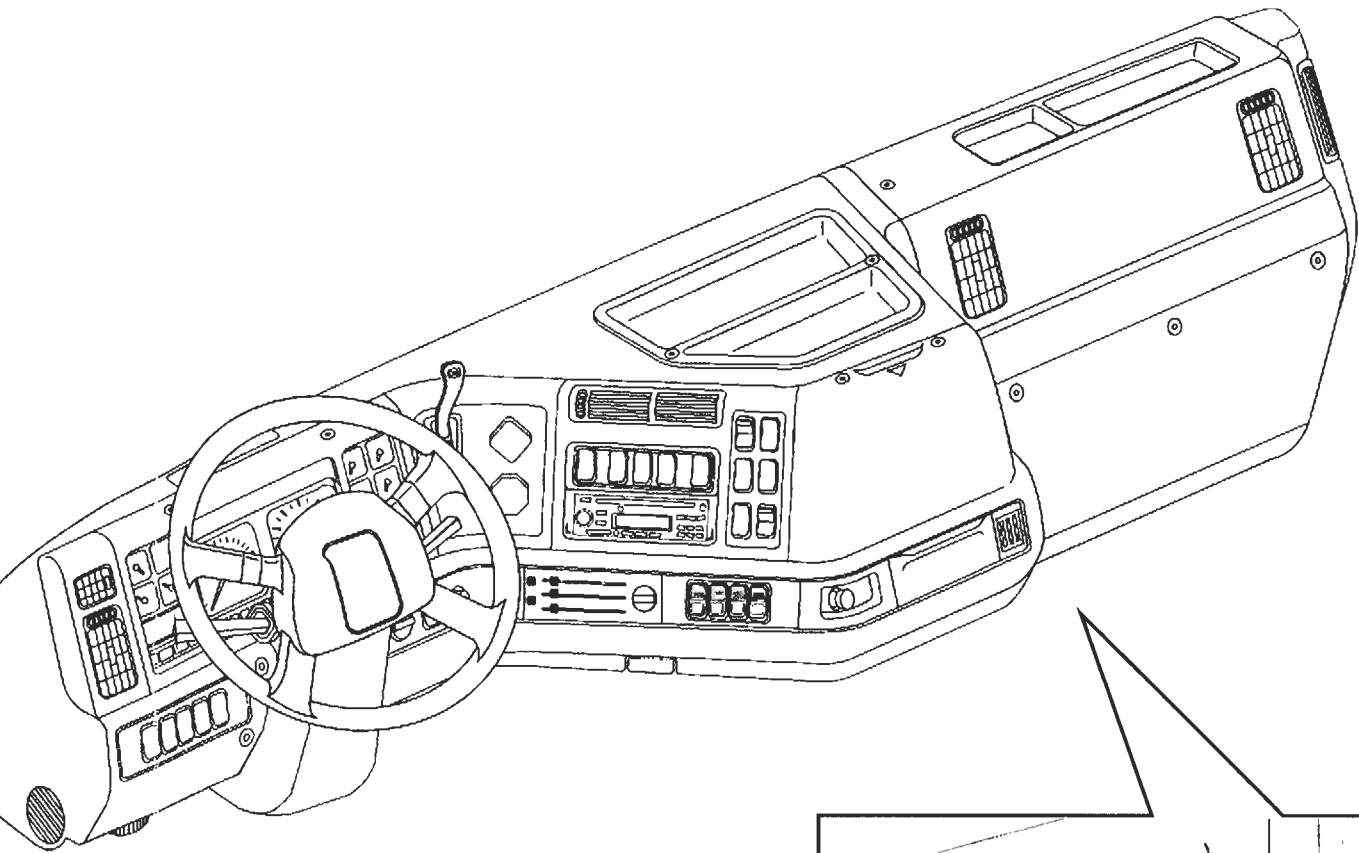

0168

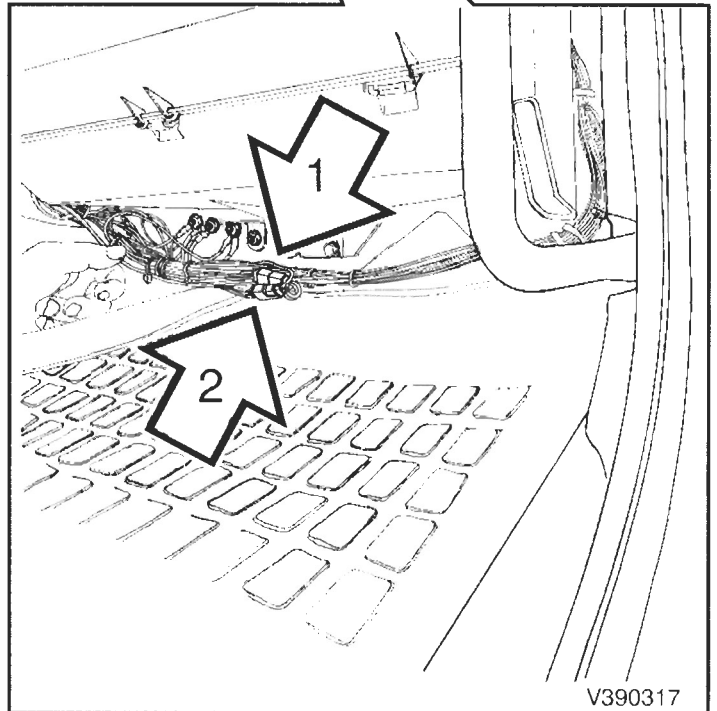

V390317