


Service Manual Trucks


Group 37
Electrical Schematic:
Smoke Detector

VN

From Build Date 5.99

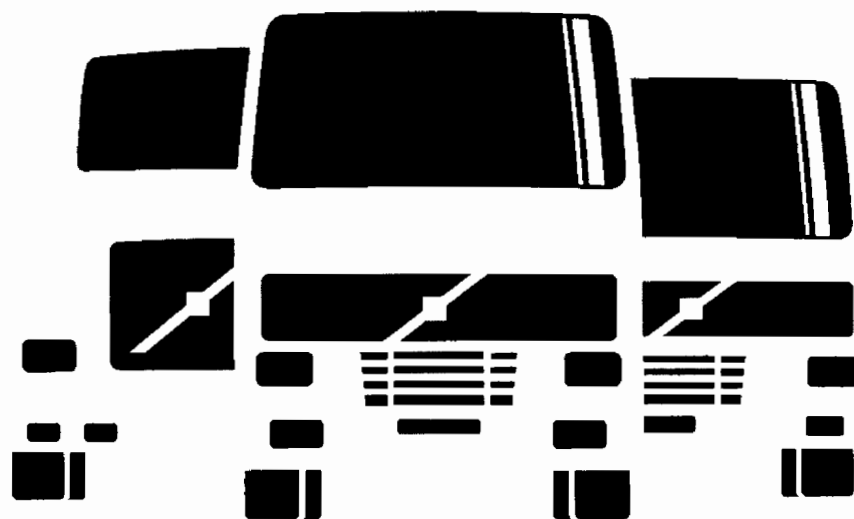

CONNECTOR AND SPLICE INFORMATION
CONNECTORS VIEWED FROM CABLE ENTRY



CONNECTOR 1
SMOKE DETECTOR DISABLE SWITCH

TABLE OF CONTENTS		
CAVITY	CIRCUIT	FUNCTION
1	070A	GROUND
3	723	GROUND
9	0A	GROUND
10	141-AB	ILLUMINATION

CONNECTOR 2
SMOKE DET. MAIN CAB HARN.



TABLE OF CONTENTS		
CAVITY	CIRCUIT	FUNCTION
A	722	12 VOLT SUPPLY
B	723	GROUND

CONNECTOR 3
POWERPOINT CONNECTOR B1-3



TABLE OF CONTENTS		
CAVITY	CIRCUIT	FUNCTION
1	0	GROUND
2	722	12 VOLT SUPPLY

CONNECTOR 4
SMOKE DETECTOR OVERHEAD HARN.



TABLE OF CONTENTS		
CAVITY	CIRCUIT	FUNCTION
A	722	12 VOLT SUPPLY
B	723	GROUND

CONNECTOR 5
WIRE HARNESS MAIN CAB OPTION 00NN. 2



TABLE OF CONTENTS		
CAVITY	CIRCUIT	FUNCTION
A	490	RADIO FEED
B	00	GROUND
C	141-AA	ILLUMINATION

CONNECTOR 6
WIRE HARNESS MAIN CAB OPTION 00NN. 1



TABLE OF CONTENTS		
CAVITY	CIRCUIT	FUNCTION
A	490	RADIO FEED
B	00	GROUND
C	141-A	ILLUMINATION

SPLICE LOCATION CHART		
SPLICE	HARNESS	LOCATION
1	CAB	300MM FROM CHASSIS HARN. BREAKOUT


SYMBOL DEFINITION



DENOTES SPLICE

EXAMPLE SHOWN IS A 1-2 SPLICE

SYMBOL DEFINITION



DENOTES MALE TERMINAL

DENOTES CONNECTOR

DENOTES CAVITY

DENOTES FEMALE TERMINAL

CHANGE HISTOR

EFFECTIVE DATE	DESCRIPTION

CHANGE HISTORY

DESCRIPTION

